




**Schedule 80 Fittings**

**Coupling - Eccentric Reducer**

Socket x Socket




Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
829-101FE	3/4X1/2	3-7/16	1- 3/8	1- 1/8	1-7/16	.08
829-130FE	1X1/2	4-1/16	1- 5/8	1- 1/8	1-13/16	.12
829-131FE	1X3/4	4	1- 5/8	1-1/8	1- 3/4	.13
829-168FE	1-1/4X1	4-5/8	2	1-11/16	1-7/8	.23
829-209FE <sup>2</sup>	1-1/2X1/2	8	2- 1/4	1- 1/8	5-1/2	.33
829-210FE <sup>2</sup>	1-1/2X3/4	7-15/16	2- 1/4	1- 3/8	5-7/16	.33
829-211FE	1-1/2X1	5-5/16	2-1/4	1-11/16	2-9/16	.24
829-212FE	1-1/2X1-1/4	4-9/16	2- 5/16	2- 1/16	1-9/16	.30
829-249FE	2X1	6- 1/8	2- 3/4	1-11/16	3- 1/8	.39
829-250FE	2X1-1/4	6- 1/8	2- 3/4	2- 1/16	2- 7/8	.39
829-251FE	2X1-1/2	5-9/16	2- 3/4	2- 5/16	2-5/16	.33
829-289FE <sup>2</sup>	2-1/2X1	10-3/8	3-5/16	1-11/16	7-1/8	.88
829-290FE <sup>2</sup>	2-1/2X1-1/4	10-3/8	3- 5/16	2- 1/16	6-7/8	.99
829-291FE <sup>2</sup>	2-1/2X1-1/2	9-13/16	3- 5/16	2- 5/16	6-5/16	.94
829-292FE	2-1/2X2	6-5/8	3- 5/16	2-13/16	2-7/8	.69
829-335FE <sup>2</sup>	3X1	11- 7/8	3-15/16	1-11/16	8- 3/8	1.12
829-336FE <sup>2</sup>	3X1-1/4	11- 7/8	3-15/16	2- 1/16	8- 1/8	1.22
829-337FE <sup>2</sup>	3X1-1/2	11-5/16	3-15/16	2- 5/16	7-9/16	1.21
829-338E	3X2	5-7/8	4-5/32	2-7/8	2-15/32	1.00
829-338FE	3X2	8- 1/8	3-15/16	2-13/16	4- 1/8	.83
829-339FE	3X2-1/2	7- 1/4	4- 1/16	3- 7/16	3	1.05
829-417FE <sup>3</sup>	4X1	17	5- 1/8	1-11/16	13- 1/2	2.37
829-418FE <sup>3</sup>	4X1-1/4	17	5- 1/8	2- 1/16	13- 1/4	2.31
829-419FE <sup>3</sup>	4X1-1/2	16-7/16	5- 1/8	2- 5/16	12-11/16	2.37
829-420FE <sup>2</sup>	4X2	13- 1/4	5- 1/8	2-13/16	9- 1/4	2.22
829-421FE <sup>2</sup>	4X2-1/2	12- 3/8	5- 1/8	3- 7/16	8- 1/8	2.40
829-422FE	4X3	8- 3/4	5- 1/8	4- 1/8	4- 1/4	1.69
829-490FE	5X4	10	6-1/4	5-3/16	4-3/4	2.75
829-528FE <sup>3</sup>	6X2	20- 7/8	7- 5/16	2-13/16	15- 7/8	5.30
829-529FE <sup>3</sup>	6X2-1/2	20	7- 5/16	3- 7/16	14- 3/4	4.95
829-530FE <sup>2</sup>	6X3	16- 3/8	7- 5/16	4- 1/8	10- 7/8	4.58
829-532FE	6X4	11- 1/8	7- 5/16	5- 3/16	5- 5/8	3.39
829-533FE	6X5	11- 1/4	7- 3/8	6- 5/16	5	4.31
829-575FE <sup>5</sup>	8X1	34-3/8	9-1/2	1-11/16	28-7/8	13.09
829-577FE <sup>5</sup>	8X1-1/2	34-1/4	9-1/2	2-5/16	28-1/2	11.56
829-578FE <sup>4</sup>	8X2	30- 5/8	9- 1/2	2-13/16	24- 5/8	11.40
829-580FE <sup>3</sup>	8X3	26- 1/8	9- 1/2	4- 1/8	19- 5/8	11.45
829-582FE <sup>2</sup>	8X4	20- 7/8	9- 1/2	5- 3/16	14- 3/8	10.08
829-583FE <sup>2</sup>	8X5	21	9- 1/2	6- 5/16	13- 3/4	10.77
829-585FE	8X6	15- 1/4	9- 1/2	7- 1/2	7- 3/4	8.40
829-624FE <sup>3</sup>	10X4	32	11- 3/4	5- 3/16	24- 1/2	20.83



**Coupling - Eccentric Reducer**

(Continued)


Socket x Socket



Part Number	Size	L	M	M1	N	Approx. Wt. (Lbs.)
829-625FE <sup>3</sup>	10X5	32- 1/8	11- 3/4	6- 5/16	23- 7/8	22.82
829-626FE <sup>2</sup>	10X6	26- 1/2	11- 3/4	7- 1/2	18	18.61
829-628FE	10X8	18- 1/16	11- 3/4	9- 5/8	8- 9/16	13.81
829-664FE <sup>4</sup>	12X4	43- 1/2	13-15/16	5- 3/16	35	37.53
829-666FE <sup>3</sup>	12X6	37- 7/8	13-15/16	7- 1/2	28- 3/8	36.65
829-668FE <sup>2</sup>	12X8	29- 9/16	13-15/16	9- 5/8	19- 1/16	32.09
829-670FE	12X10	20- 5/8	13-15/16	11-15/16	9- 1/8	23.63
829-696FE <sup>3</sup>	14X6	41- 3/8	15- 3/16	7- 1/2	31- 1/8	41.01
829-698FE <sup>2</sup>	14X8	33- 1/16	15- 3/16	9- 5/8	21-13/16	35.00
829-700FE	14X10	24- 1/8	15- 3/16	11-15/16	11- 7/8	29.88
829-702FE	14X12	20- 1/8	15- 3/8	14- 1/8	6- 7/8	30.11
829-756FE <sup>4</sup>	16X6	54- 1/4	17- 1/2	7- 1/2	43	73.56
829-758FE <sup>3</sup>	16X8	45-15/16	17- 1/2	9- 5/8	33-11/16	69.73
829-760FE <sup>2</sup>	16X10	37	17- 1/2	11-15/16	23- 3/4	59.25
829-762FE <sup>2</sup>	16X12	33	17- 1/2	14- 1/8	18- 3/4	64.09
829-764FE	16X14	24- 5/8	17- 1/2	15- 1/2	9- 5/8	45.99
829-786FE <sup>5</sup>	18X6	69- 1/4	19-11/16	7- 1/2	57	121.36
829-788FE <sup>4</sup>	18X8	60-15/16	19-11/16	9- 5/8	47-11/16	132.39
829-790FE <sup>3</sup>	18X10	52	19-11/16	11-15/16	37- 3/4	109.42
829-792FE <sup>3</sup>	18X12	48	19-11/16	14- 1/8	32- 3/4	109.80
829-794FE <sup>2</sup>	18X14	39- 5/8	19-11/16	15- 1/2	23- 5/8	97.05
829-796FE	18X16	28- 5/8	19-11/16	17-11/16	11- 5/8	66.93

**Eccentric Reducer Coupling Footnotes**  
Multi-Step Configurations

The number after the part number denotes steps listed below.

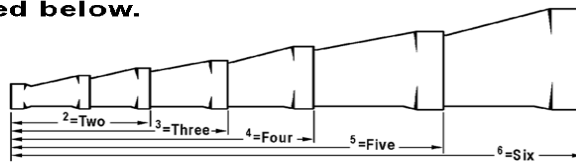

Example: 829-626FE<sup>2</sup> (2 = 2 Step)

